


RG6 Coaxial Cable



Technical Data	
Inner Conductor (mm)	1.02
Conductor Material	Copper
FPE (mm)	4.8
Aluminium Foil Bonded	Yes
Braid Coverage	64x0,12 mm AL wire
Jacket	6,8mm PVC
Colour	White
Packing	100m

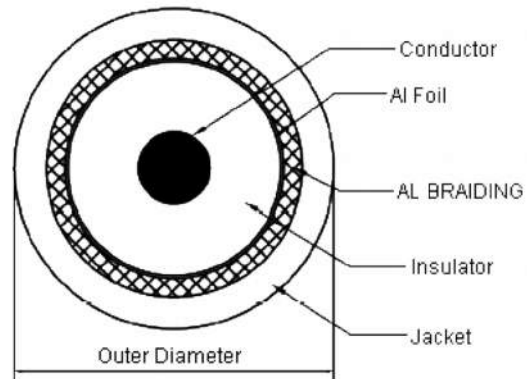

Applications

These cables are used as connection cables in low attenuation systems such as indoor CATV , CCT distribution and SATV satellite systems.

