

LED BULB

Product&Family Code:

001


016

0020


TORCH-20



Technical Drawing

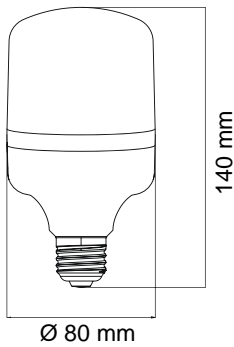


Photometric Diagram

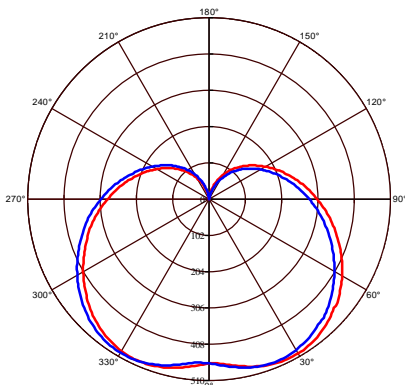

C0 Plane beam angle(50%) C90 Plane beam angle(50%)

C0 Plane beam angle(50%):200.2(DEG) C90 Plane beam angle(50%):199.8(DEG)

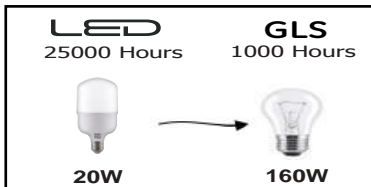

| Technical Data | |
|---|--------------------|
| Voltage (V) | 175-250V |
| Product Wattage (W) | 20 |
| Equivalence with incandescent lamp | 160 |
| Colour Render Index (Ra) | >Ra75 |
| Colour Temperature (K) | 3000K-4200K-6400K |
| Materials | Aluminium + PC |
| Protection Class | - |
| Dimmable | No |
| EEI | A ⁺ |
| Warm-up time up to 60 %of the full light output | Instant Full Light |
| Luminous Flux (lm) | 1650 |
| Luminous Efficacy (lm/W) | 82.5 |
| Rated Life (hrs) ⌚ | 25,000 |
| IP Rating | - |
| Power Factor | >0.5 |
| Beam Angle ☆ | 200 ° |
| Starting Time | >0.2s |
| Number of ON-OFF cycling | x20,000 |

Applications

- Applicable to the shops along the street, shops, shopping malls supermarkets and other indoor lighting places.



Features

- Low power consumption
- Efficient replacement for incandescent lamps
- Mercury free, no UV and IR radiation
- Instant on, 100% light output

