



# LED CAPSULE




Technical Drawing



Photometric Diagram

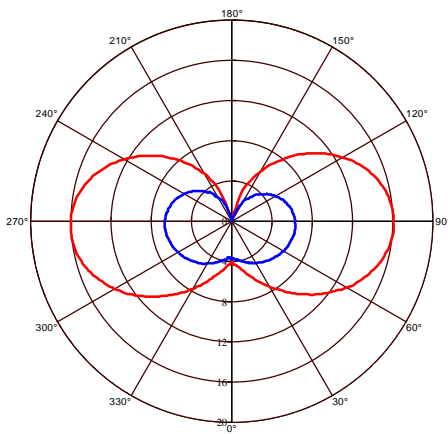

a C0 Plane beam angle(50%)    b C90 Plane beam angle(50%)  
 C0 Plane beam angle(50%):278.2(DEG)    C90 Plane beam angle(50%):283.5(DEG)

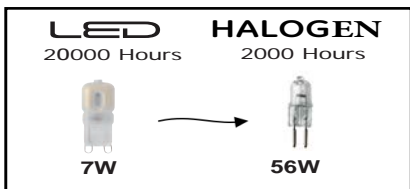

Product&Family Code: 001 023 0007

**DECO-7**

| Technical Data                                  |                    |
|---|--------------------|
| Voltage (V)                                     | 220-240V AC        |
| Product Wattage (W)                             | 7                  |
| Equivalence with Halogen lamp                   | 56                 |
| Colour Render Index (Ra)                        | >Ra70              |
| Colour Temperature (K)                          | 2700K-4200K-6400K  |
| Materials                                       | Plastic            |
| Protection Class                                | -                  |
| Dimmable  | No                 |
| EEL   | <b>A+</b>          |
| Warm-up time up to 60 %of the full light output | Instant Full Light |
| Luminous Flux (lm)                              | 630                |
| Luminous Efficacy (lm/W)                        | 90                 |
| Rated Life (hrs) ⌚                              | 20,000             |
| IP Rating                                       | -                  |
| Power Factor                                    | >0.5               |
| Beam Angle ☆                                    | 360 °              |
| Starting Time                                   | <0.5s              |
| Number of ON-OFF cycling                        | x10,000            |

## Applications

- Chandelier, Halogen Downlight etc.



## Features

- Very low energy consumption.
- High Lumen and CRI, good quality
- High heat dissipation, low carbon and environmental protection

