

LED TUBE

Product&Family Code:

002 001 0024

LED TUBE-150




Connection Diagram



Technical Data

Voltage (V)	175-250V
Product Wattage (W)	24
Equivalence with incandescent lamp(W)	192
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	6400K
Materials	PC
Dimmable	No
EEL	A+
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	2400
Luminous Efficacy (lm/W)	100
Rated Life (hrs) ⌚	25.000
Power Factor	>0.5
Beam Angle	160°
Number of ON-OFF cycling	x15.000

Photometric Diagram

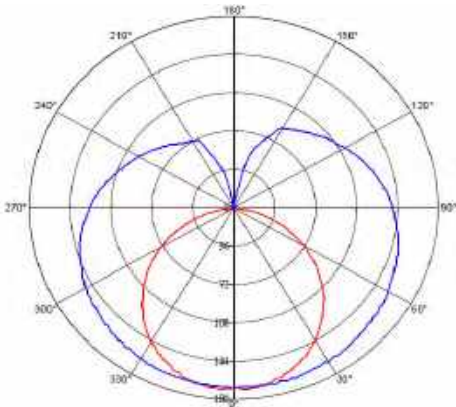


⌚ C0 Plane beam angle(180°) ⌚ C30 Plane beam angle(150°)
⌚ C60 Plane beam angle(120°) ⌚ C90 Plane beam angle(90°)

Applications

- Office, hospitality, industrial, car park.



Technical Drawing



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base
- Very low energy consumption

//// ☂	15.000X ON / OFF	NO UV / IR	mA 240
%85 ENERGY Saving	⌚ 25000h Lifetime	Hg 0,0mg	👁️ Optimally
⚠️	Start Up Time <0.5	160°	🌡️ -10°C / 40°C
Ra >80	Warm Up %60 < 0.5 s.c.	PF >0.5 Power Factor	

