


LED BULB

Product&Family Code: 001 002 0006



PLUS-6



Technical Drawing



Photometric Diagram

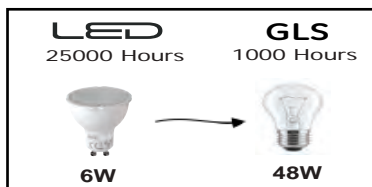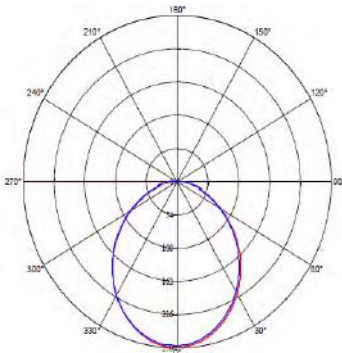

| Technical Data | |
|---|--------------------------------------|
| Voltage (V) | 175-250V |
| Product Wattage (W) | 6 |
| Equivalence with incandescent lamp | 48 |
| Colour Render Index (Ra) | >Ra80 |
| Colour Temperature (K) | 3000K-4200K-6400K |
| Materials | Aluminium Housing with PMMA Diffuser |
| Protection Class | - |
| Dimmable | No |
| EEL | A+ |
| Warm-up time up to 60 %of the full light output | Instant Full Light |
| Luminous Flux (lm) | 390 |
| Luminous Efficacy (lm/W) | 65 |
| Rated Life (hrs) Ⓟ | 25,000 |
| IP Rating | - |
| Power Factor | >0.5 |
| Beam Angle ☆ | 105 ° |
| Starting Time | <0.5 |
| Number of ON-OFF cycling | x12,500 |






Applications

- The luminaire is an excellent solutions for market, museum, restaurant, show room, and other spot lighting needed.



Features

- Low power consumption
- Efficient replacement for incandescent lamps
- Mercury free, no UV and IR radiation
- Instant on, 100% light output

| | | | |
|---|--------------------|---|---|
|  | 12.500X ON / OFF |  0,0mg |  Optimally |
| NO UV / IR | mA 52 | Ra >80 | Warm Up %60 < 0.5 sc. |
|  | Start Up Time <0.5 | 105 ° | -10°C 40°C |
| %85 ENERGY Saving | 25000h Lifetime | PF >0.5 Power Factor |  |

